Common connectivity options

Called 'Ethernet'. For local area networking (LAN) using Cat 5 cables. 100m range

Called 'Wireless'. 802.11g or 802.11n. For local area networking (LAN) with no cables. 30m range..

Called 'USB'. For connecting peripherals using USB cables. 3m range.

Called 'Bluetooth'. For connecting peripherals with no cables. 10m range.

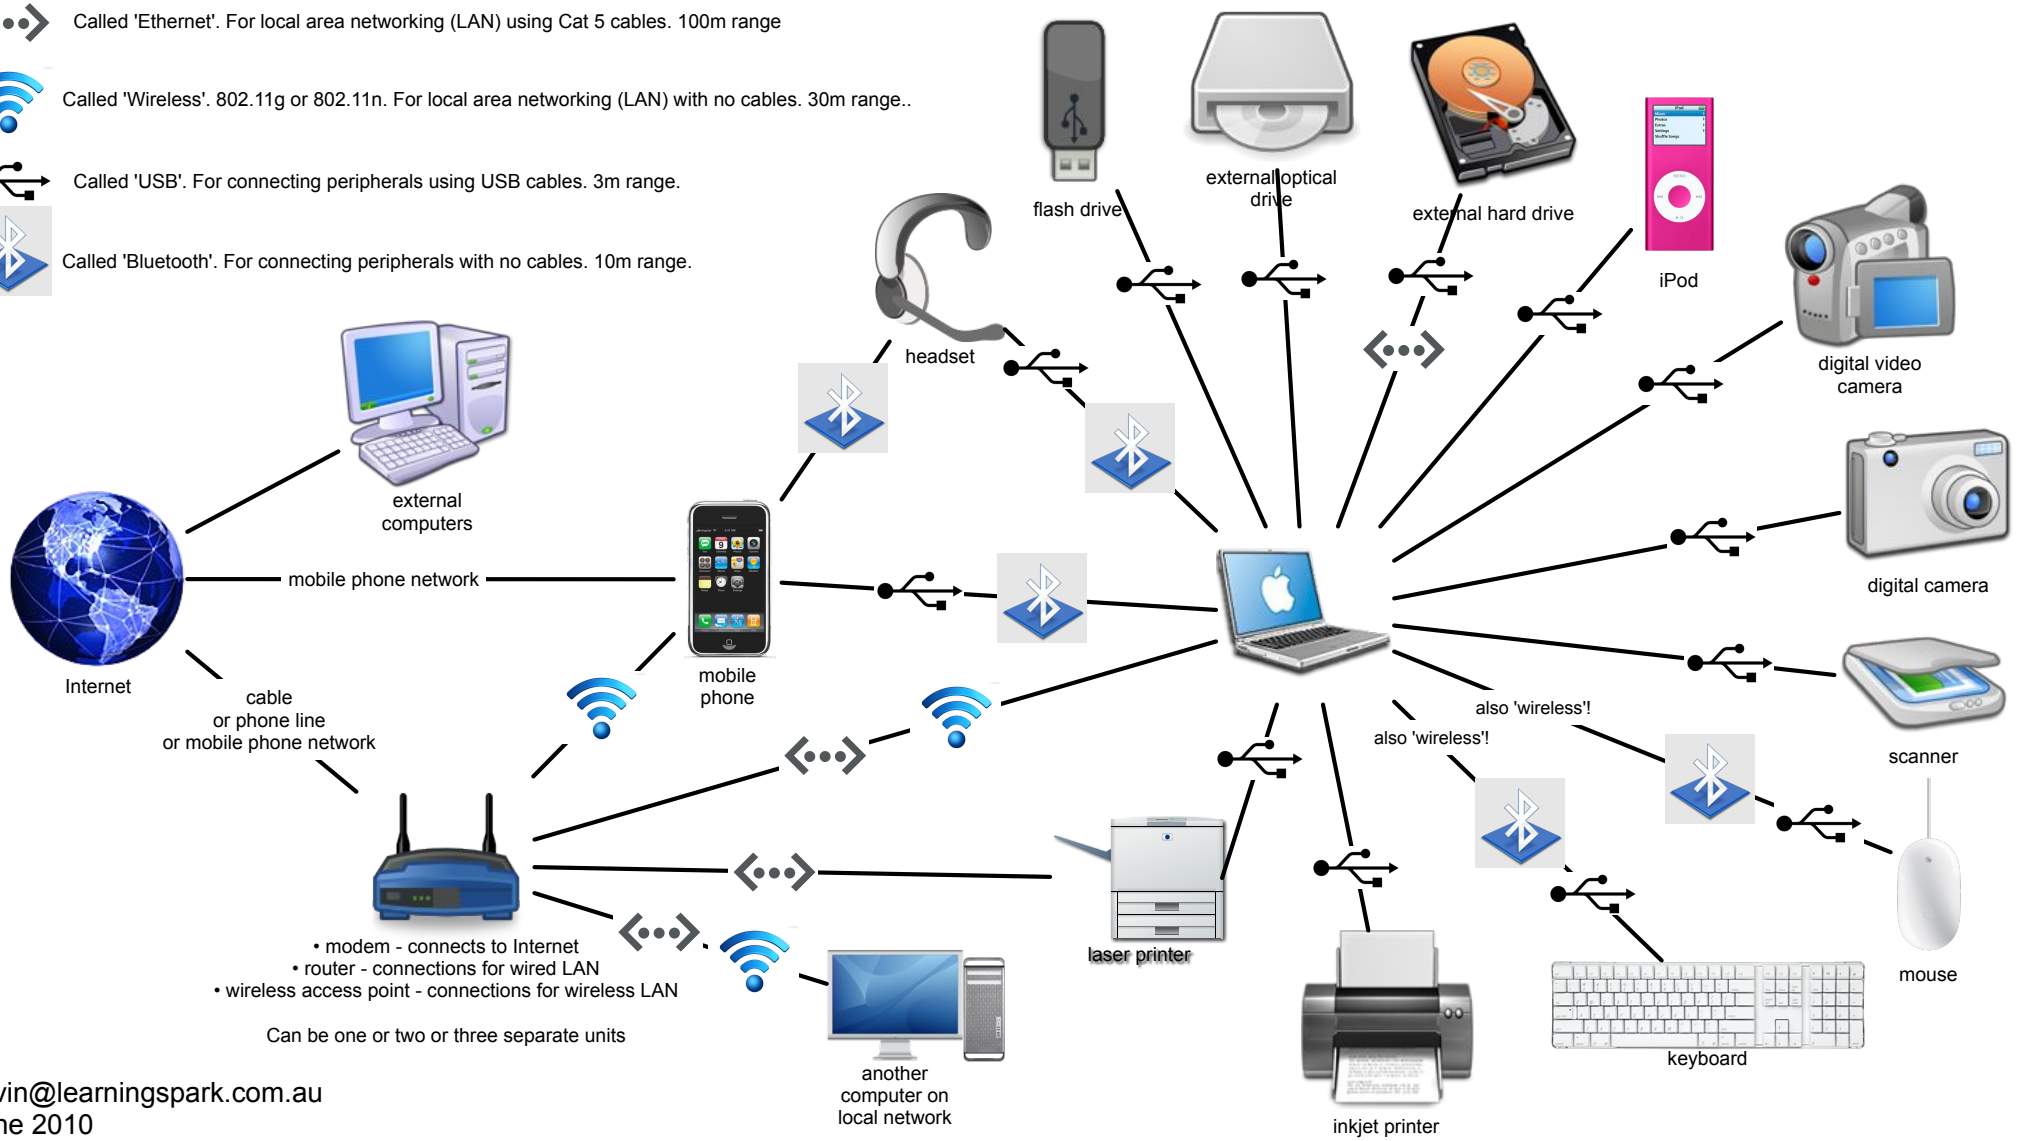

kevin@learningspark.com.au
June 2010